


Technical Data Sheet
 Electric Motor Three phase in Cast Iron IE4

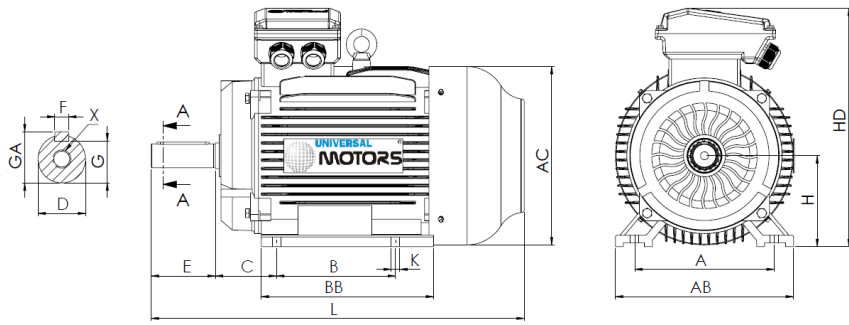

L (standard motor)

1535

L (motor w/brake)

1775

L (motor w/forced ventilation)

1770

L (motor without ventilation)

1400

Feet					Shaft						Carcass				Flange				
H	A	B	C	K	D	E	F	G	GA	X	AB	BB	AC	HD	M	N	P	S	T
355	610	560	254	28	95m6	170	25	86	101	M20x42	730	755	698	1010	-	-	-	-	-

Electrical Data

Type	UM4C 355M2-6	
Poles	6/1000	Poles
Power	200.00	Kw
Voltage	400	V
Frequency	50	Hz
Speed	990	rpm
Nominal current	348.58	A
Power factor	0.86	
Efficiency 100%	96.3	%
Efficiency 75%	96.2	%
Efficiency 50%	95.0	%
Torque	1929.2	N.m
Ta/Tn	1.6	
Ia/In	8.0	
Tm/Tn	2	

Mechanical Data

Shaft height	355	
Construction form	B3	
Mechanical protection	55	
Heating class	B	
Insulation class	F	
Service	S1	
Ambient temp.	-10°C-40°C	
Altitude	1000	
Noise	85	dB(A)
Weight	1663	kg
Bearing DE	NU 322	
Bearing NDE	6322 C3	

Extra Data

Applicable brakes

DC brake	K12D	Brake torque	4500	N.m
AC brake	NA	Brake torque	NA	N.m

Applicable forced ventilations

Single-phase forced ventilation	Power	NA	W
Three-phase forced ventilation	Power	700	W

Universal Motors S.A.
 Rua Comendador Brandão, 484
 4495-375 Póvoa de Varzim
geral@universalmotors.pt
 TEL.: 252 299 080

Universal Motors UK, Ltd
 Unit E2, Meltham Mills Road
 West Yorkshire HD9 4AR
enquiries@universalmotors-group.co.uk
 TEL.: +44(0) 1484660222

Universal Motors SL
 C/La Habana n.6 nave 4 PI Camporoso
 28806 Alcala de Henares
info@universalmotors-group.es
 TEL.: 918 864 213