


Technical Data Sheet  
Electric Motor Three phase in Aluminum IE2

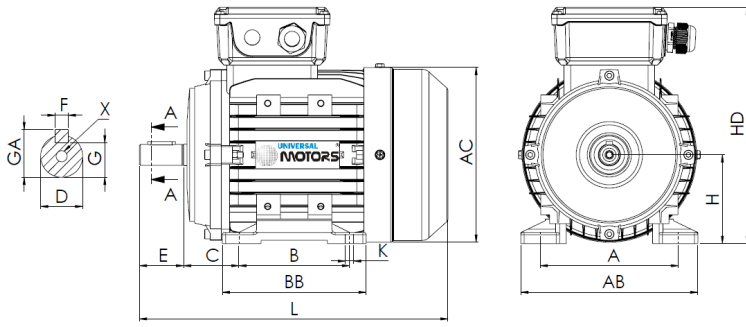

L (standard motor)

384

L (motor w/brake)

460

L (motor w/forced ventilation)

495

L (motor without ventilation)

339

Feet					Shaft						Carcass				Flange				
H	A	B	C	K	D	E	F	G	GA	X	AB	BB	AC	HD	M	N	P	S	T
100	160	140	63	12	28j6	60	8	24	31	M10x22	198	176	205	252	-	-	-	-	-

**Electrical Data**

Type	HE31/UMHA*	
	100L2-6	
Poles	6/1000	Poles
Power	2.20	Kw
Voltage	400	V
Frequency	50	Hz
Speed	940	rpm
Nominal current	5.11	A
Power factor	0.76	
Efficiency 100%	81.8	%
Efficiency 75%	83.5	%
Efficiency 50%	82.3	%
Torque	22.35	N.m
Ta/Tn	2.1	
Ia/In	5.5	
Tm/Tn	2.4	

**Mechanical Data**

Shaft height	100
Construction form	B3
Mechanical protection	55
Heating class	B
Insulation class	F
Service	S3-70%
Ambient temp.	-10°C-40°C
Altitude	1000
Noise	22.35 dB(A)
Weight	26 kg
Bearing DE	6206 2Z C3
Bearing NDE	6206 2Z C3

**Extra Data**

**Applicable brakes**

DC brake	NA	Brake torque	NA	N.m
AC brake	NA	Brake torque	NA	N.m

**Applicable forced ventilations**

Single-phase forced ventilation	Power	65	W
Three-phase forced ventilation	Power	65	W

Universal Motors S.A.  
Rua Comendador Brandão, 484  
4495-375 Póvoa de Varzim  
[geral@universalmotors.pt](mailto:geral@universalmotors.pt)  
TEL.: 252 299 080

Universal Motors UK, Ltd  
Unit E2, Meltham Mills Road  
West Yorkshire HD9 4AR  
[enquiries@universalmotors-group.co.uk](mailto:enquiries@universalmotors-group.co.uk)  
TEL.: +44(0) 1484660222

Universal Motors SL  
C/La Habana n.6 nave 4 PI Camporosso  
28806 Alcala de Henares  
[info@universalmotors-group.es](mailto:info@universalmotors-group.es)  
TEL.: 918 864 213