


Technical Data Sheet

Electric Motor Three phase in Aluminum -

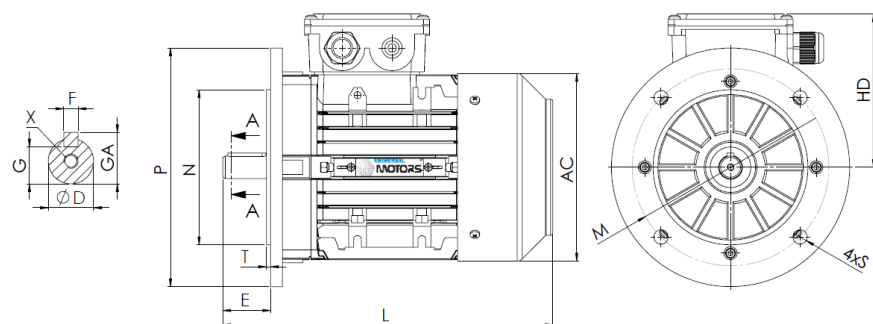

L (standard motor)

655

L (motor w/brake)

735

L (motor w/forced ventilation)

765

L (motor without ventilation)

560

Feet					Shaft						Carcass				Flange				
H	A	B	C	K	D	E	F	G	GA	X	AB	BB	AC	HD	M	N	P	S	T
-	-	-	-	-	42k6	110	12	37	45	M16x36	-	-	314	231	300	250	350	19	5

Electrical Data

Type	UMDA 160L1-4/8	
Poles	4/8	Poles
Power	11 / 2,8	Kw
Voltage	400	V
Frequency	50	Hz
Speed	1460 / 720	rpm
Nominal current	22 / 8,5	A
Power factor	0,83 / 0,58	
Efficiency 100%	88 / 81	%
Efficiency 75%	-	%
Efficiency 50%	-	%
Torque	71 / 36	N.m
Ta/Tn	2,3 / 1,4	
Ia/In	8,0 / 4,0	
Tm/Tn	2,7 / 1,8	

Mechanical Data

Shaft height	-
Construction form	B5
Mechanical protection	55
Heating class	B
Insulation class	F
Service	S1
Ambient temp.	-10°C-40°C
Altitude	1000
Noise	- dB(A)
Weight	85 kg
Bearing DE	6309 2Z C3
Bearing NDE	6209 2Z C3

Extra Data

Applicable brakes

DC brake	K8	Brake torque	200	N.m
AC brake	AC8	Brake torque	200	N.m

Applicable forced ventilations

Single-phase forced ventilation	Power	NA	W
Three-phase forced ventilation	Power	60	W

Universal Motors S.A.
Rua Comendador Brandão, 484
4495-375 Póvoa de Varzim
geral@universalmotors.pt
TEL.: 252 299 080

Universal Motors UK, Ltd
Unit E2, Meltham Mills Road
West Yorkshire HD9 4AR
enquiries@universalmotors-group.co.uk
TEL.: +44(0) 1484660222

Universal Motors SL
C/La Habana n.6 nave 4 PI Camporoso
28806 Alcala de Henares
info@universalmotors-group.es
TEL.: 918 864 213