


Technical Data Sheet
Electric Motor 1 phase in Aluminum IE2

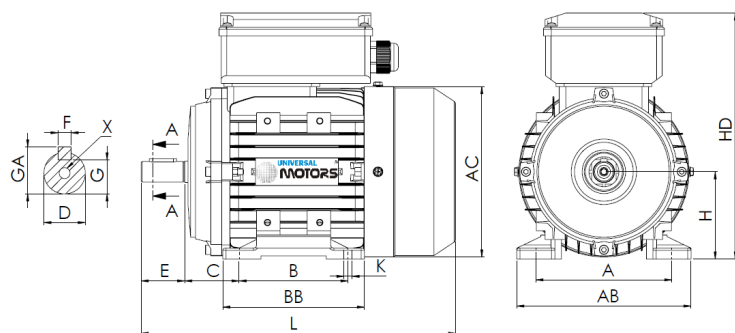

L (standard motor)

241

L (motor w/brake)

349

L (motor w/forced ventilation)

350

L (motor without ventilation)

218

Feet					Shaft						Carcass				Flange				
H	A	B	C	K	D	E	F	G	GA	X	AB	BB	AC	HD	M	N	P	S	T
71	112	90	45	7	14j6	30	5	11	16	M5x12	132	104	139	196	-	-	-	-	-

Electrical Data

Type	UMM2C 71M2-2	
Poles	2/3000	Poles
Power	0.55	Kw
Voltage	230	V
Frequency	50	Hz
Speed	2815	rpm
Nominal current	3.33	A
Power factor	0.97	
Efficiency 100%	74.1	%
Efficiency 75%	71.1	%
Efficiency 50%	66.1	%
Torque	1.87	N.m
Ta/Tn	0.55	
Ia/In	4.5	
Tm/Tn	1.8	

Mechanical Data

Shaft height	71	
Construction form	B3	
Mechanical protection	55	
Heating class	B	
Insulation class	F	
Service	S1	
Ambient temp.	-10°C-40°C	
Altitude	1000	
Noise	-	dB(A)
Weight	7.55	kg
Bearing DE	6202 2Z C3	
Bearing NDE	6202 2Z C3	

Extra Data

Applicable brakes

DC brake	REB-05-06	Brake torque	4	N.m
AC brake	NA	Brake torque	NA	N.m

Applicable forced ventilations

Single-phase forced ventilation	Power	35	W
Three-phase forced ventilation	Power	NA	W

Universal Motors S.A.
Rua Comendador Brandão, 484
4495-375 Póvoa de Varzim
geral@universalmotors.pt
TEL.: 252 299 080

Universal Motors UK, Ltd
Unit E2, Meltham Mills Road
West Yorkshire HD9 4AR
enquiries@universalmotors-group.co.uk
TEL.: +44(0) 1484660222

Universal Motors SL
C/La Habana n.6 nave 4 PI Camporoso
28806 Alcala de Henares
info@universalmotors-group.es
TEL.: 918 864 213