


Technical Data Sheet
Electric Motor 1 phase in Aluminum IE2

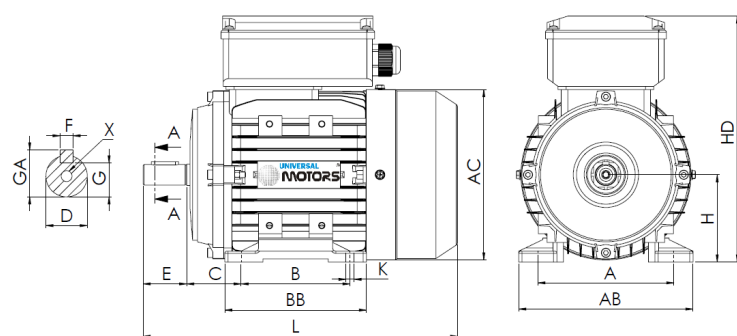

L (standard motor)

290

L (motor w/brake)

353

L (motor w/forced ventilation)

393

L (motor without ventilation)

248

Feet					Shaft						Carcass				Flange				
H	A	B	C	K	D	E	F	G	GA	X	AB	BB	AC	HD	M	N	P	S	T
80	125	100	50	10	19j6	40	6	15.5	21.5	M6x16	160	130	156	226	-	-	-	-	-

Electrical Data

Type	UMM2C 80M1-2	
Poles	2/3000	Poles
Power	0.75	Kw
Voltage	230	V
Frequency	50	Hz
Speed	2850	rpm
Nominal current	4.26	A
Power factor	0.99	
Efficiency 100%	77.4	%
Efficiency 75%	75.6	%
Efficiency 50%	68.7	%
Torque	2.51	N.m
Ta/Tn	0.4	
Ia/In	4.9	
Tm/Tn	1.8	

Mechanical Data

Shaft height	80
Construction form	B3
Mechanical protection	55
Heating class	B
Insulation class	F
Service	S1
Ambient temp.	-10°C-40°C
Altitude	1000
Noise	- dB(A)
Weight	9.91 kg
Bearing DE	6204 2Z C3
Bearing NDE	6204 2Z C3

Extra Data

Applicable brakes

DC brake	REB-05-08	Brake torque	8	N.m
AC brake	NA	Brake torque	NA	N.m

Applicable forced ventilations

Single-phase forced ventilation	Power	45	W
Three-phase forced ventilation	Power	NA	W

Universal Motors S.A.
Rua Comendador Brandão, 484
4495-375 Póvoa de Varzim
geral@universalmotors.pt
TEL.: 252 299 080

Universal Motors UK, Ltd
Unit E2, Meltham Mills Road
West Yorkshire HD9 4AR
enquiries@universalmotors-group.co.uk
TEL.: +44(0) 1484660222

Universal Motors SL
C/La Habana n.6 nave 4 PI Camporoso
28806 Alcala de Henares
info@universalmotors-group.es
TEL.: 918 864 213