


Technical Data Sheet
Electric Motor 1 phase in Aluminum IE2

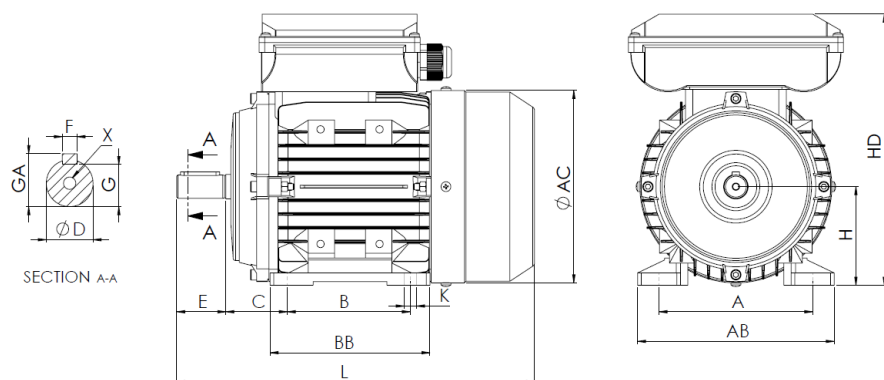

L (standard motor)

290

L (motor w/brake)

353

L (motor w/forced ventilation)

393

L (motor without ventilation)

248

Feet					Shaft						Carcass				Flange				
H	A	B	C	K	D	E	F	G	GA	X	AB	BB	AC	HD	M	N	P	S	T
80	125	100	50	10	19j6	40	6	15.5	21.5	M6x16	160	130	156	223	-	-	-	-	-

Electrical Data

Type	UMM2D 80M1-4	
Poles	4/1500	Poles
Power	0.55	Kw
Voltage	230	V
Frequency	50	Hz
Speed	1415	rpm
Nominal current	3.13	A
Power factor	0.99	
Efficiency 100%	77.1	%
Efficiency 75%	75.4	%
Efficiency 50%	67.6	%
Torque	3.71	N.m
Ta/Tn	2.4	
Ia/In	5.3	
Tm/Tn	1.7	

Mechanical Data

Shaft height	80	
Construction form	B3	
Mechanical protection	55	
Heating class	B	
Insulation class	F	
Service	S1	
Ambient temp.	-10°C-40°C	
Altitude	1000	
Noise	-	dB(A)
Weight	9.76	kg
Bearing DE	6204 2Z C3	
Bearing NDE	6204 2Z C3	

Extra Data

Applicable brakes

DC brake	REB-05-08	Brake torque	8	N.m
AC brake	NA	Brake torque	NA	N.m

Applicable forced ventilations

Single-phase forced ventilation	Power	45	W
Three-phase forced ventilation	Power	NA	W

Universal Motors S.A.
Rua Comendador Brandão, 484
4495-375 Póvoa de Varzim
geral@universalmotors.pt
TEL.: 252 299 080

Universal Motors UK, Ltd
Unit E2, Meltham Mills Road
West Yorkshire HD9 4AR
enquiries@universalmotors-group.co.uk
TEL.: +44(0) 1484660222

Universal Motors SL
C/La Habana n.6 nave 4 PI Camporoso
28806 Alcala de Henares
info@universalmotors-group.es
TEL.: 918 864 213