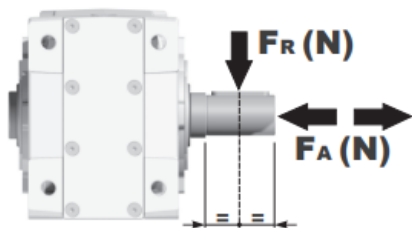


MODEL	X43A
Ø OUTPUT SHAFT	25 mm
APPROXIMATE RATIO	72
EXACT RATIO	71.78
OUTPUT SPEED	20 RPM
EXACT OUTPUT SPEED	20 RPM
INPUT POWER	0.37 KW
INPUT ROTATION	1400 RPM
INPUT PAM	71B14
OUTPUT TORQUE	170.28 N.m
NOMINAL TORQUE	150.00 N.m
NOMINAL POWER	0.33 KW
SERVICE FACTOR	0.89
DYNAMIC EFFICIENCY	0.94

Oil Quantity (L)

B3/H1	B6/H4	B7/H3	B8/H2	V5/H5	V6/H6
0.8	0.8	0.6	0.8	1.2	0.7

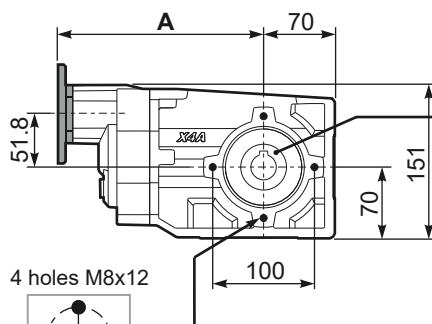

Radial and Axial Loads




n_2 [min-1]	F_A [N]	F_R [N]
250	500	2500
100	700	3500
50	960	4800
15	960	4800

PX43AC...Basic Gearbox
Riduttore baseGearbox
weight
peso riduttore**7.93 kg**



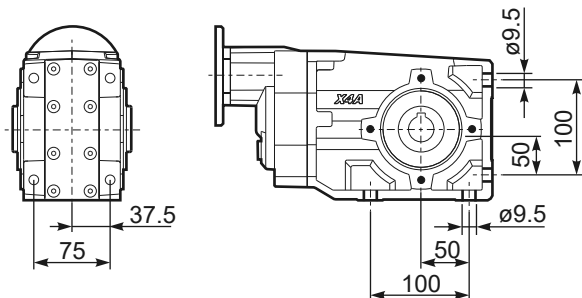
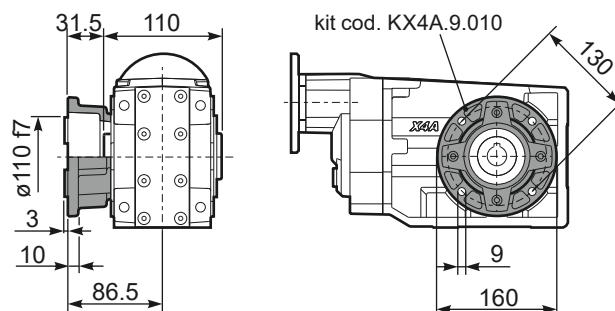
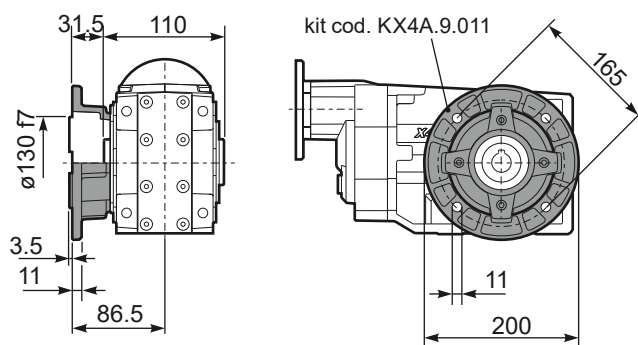
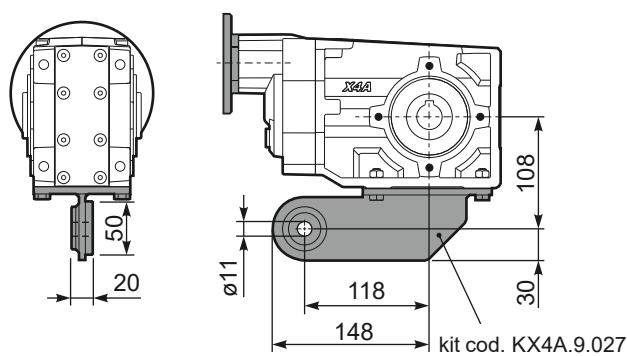
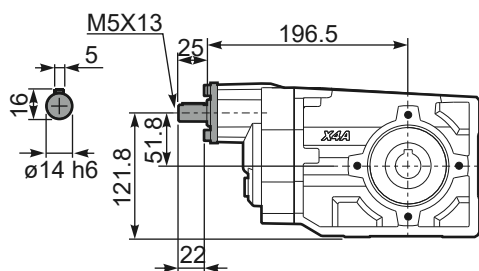
M. flanges	Kit code	øF	A
63B5	K050.4.041	138	205
71B5	K050.4.042	160	202.5
56B14	KC40.4.049	80	202.5
63B14	K050.4.047	90	205
71B14	K050.4.045	105	202.5



4 holes M8x12

**Mounting holes position**

Posizione fori di montaggio

**Standard**
Hollow shaft**On request**
A richiesta**PX43A...FB..**Feet
Piedini**PX43A...-F2..**Output flange
Flangia uscita**PX43A...-F3..**Output flange
Flangia uscita**PX43A...BR..**Reaction Arm
Braccio di reazione**RX43A...**Input shaft
Albero in entrata**PX43AA..**Single output shaft
Albero semplice in uscita