


MODEL	X52A
Ø OUTPUT SHAFT	30 mm
APPROXIMATE RATIO	20
EXACT RATIO	19.97
OUTPUT SPEED	73 RPM
EXACT OUTPUT SPEED	73 RPM
INPUT POWER	0.75 KW
INPUT ROTATION	1400 RPM
INPUT PAM	80B14
OUTPUT TORQUE	98.07 N.m
NOMINAL TORQUE	250.00 N.m
NOMINAL POWER	1.9 KW
SERVICE FACTOR	2.53
DYNAMIC EFFICIENCY	0.96

Oil Quantity (L)



B3/H1	B6/H4	B7/H3	B8/H2	V5/H5	V6/H6
0.9	1.5	0.75	1.4	1.95	1.15

Radial and Axial Loads

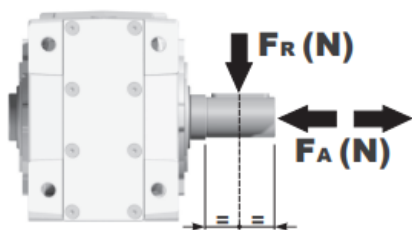


n_2 [min-1]	F_A [N]	F_R [N]
250	600	3000
100	800	4000
50	960	4800
15	1660	8300

Gearbox weight peso riduttore	12.80 kg
---	-----------------

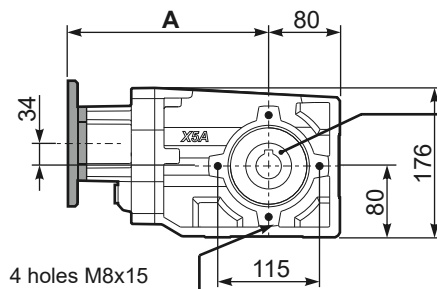

Standard



Hollow shaft





On request
A richiesta

**Mounting holes
position**
Posizione fori
di montaggio



Output flange
Flangia uscita

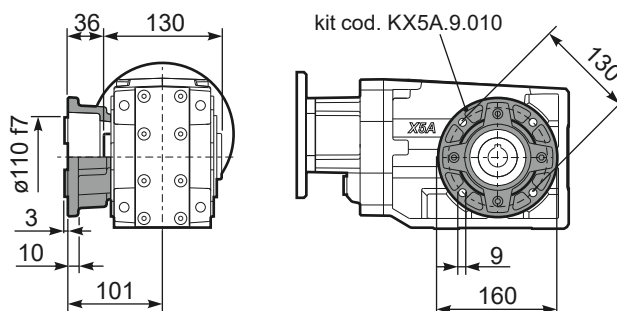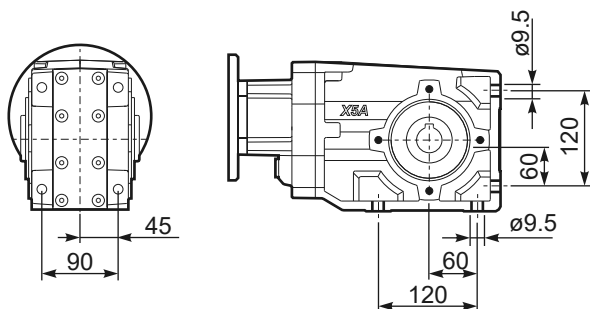

Output flange
Flangia uscita

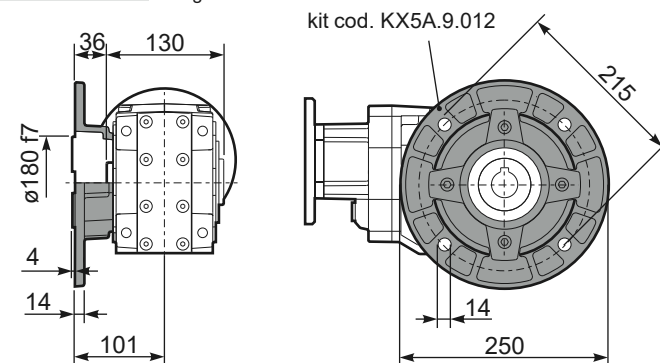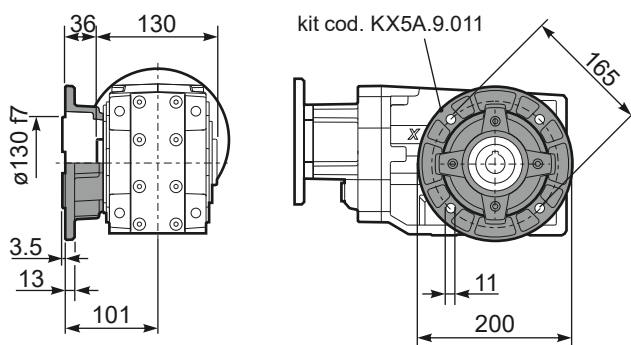


Single output shaft
Albero semplice in uscita

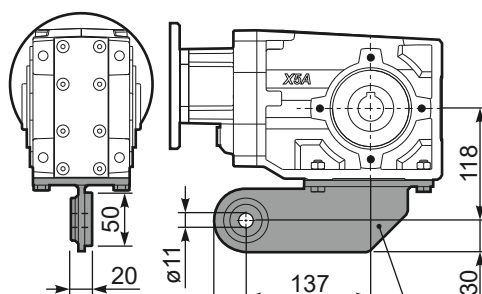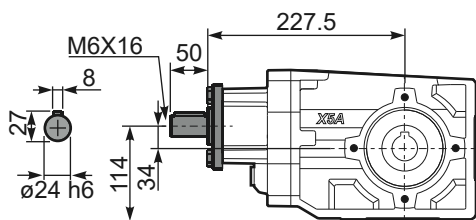

005
020

ø30 kit cod. KX5A.5.028
ø35 kit cod. KX5A.5.030



	b1	c1	d1	e1	m1	n1	t2
ø30	8	60	30	68	134	202	33
ø35	10	60	35	73.5	141	214.5	38