

MODEL	X52A	
Ø OUTPUT SHAFT	30	mm
APPROXIMATE RATIO	6	
EXACT RATIO	6.03	
OUTPUT SPEED	243	RPM
EXACT OUTPUT SPEED	242	RPM
INPUT POWER	2.20	KW
INPUT ROTATION	1400	RPM
INPUT PAM	100B5	
OUTPUT TORQUE	86.87	N.m
NOMINAL TORQUE	135.00	N.m
NOMINAL POWER	3.4	KW
SERVICE FACTOR	1.55	
DYNAMIC EFFICIENCY	0.96	

Oil Quantity (L)



B3/H1	B6/H4	B7/H3	B8/H2	V5/H5	V6/H6
0.9	1.5	0.75	1.4	1.95	1.15

Radial and Axial Loads




n_2 [min-1]	F_A [N]	F_R [N]
250	600	3000
100	800	4000
50	960	4800
15	1660	8300

Gearbox weight peso riduttore	12.80 kg
---	-----------------

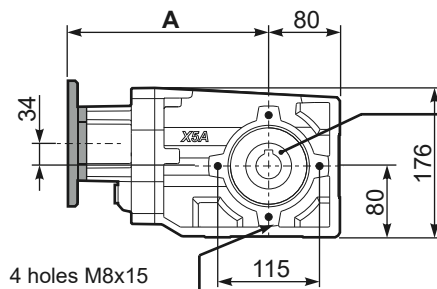

Standard

Hollow shaft





On request
A richiesta

4 holes M8x15





Mounting holes position
Posizione fori di montaggio



Output flange
Flangia uscita

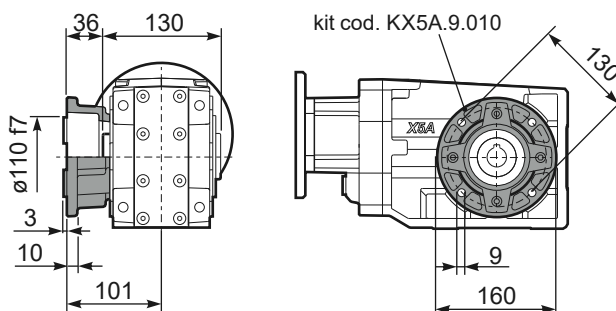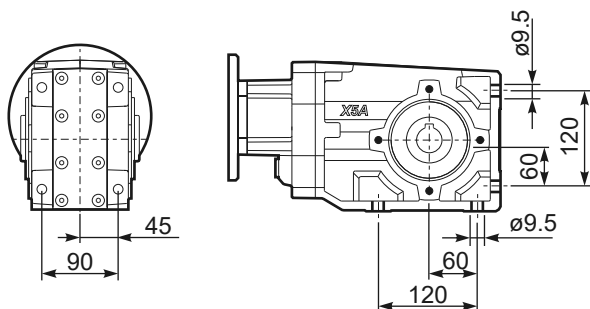

Output flange
Flangia uscita

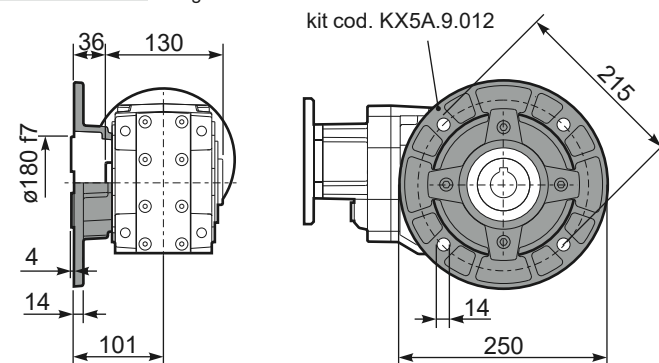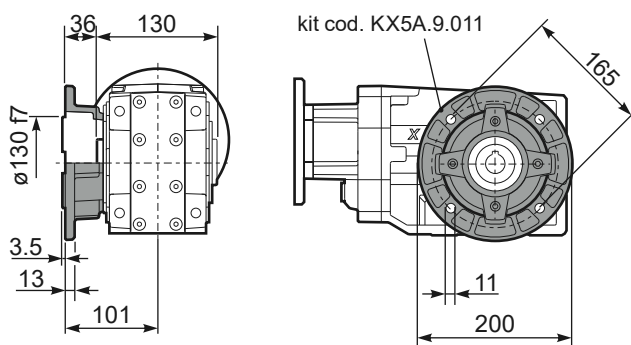

Reaction Arm	Braccio di reazione
--------------	---------------------

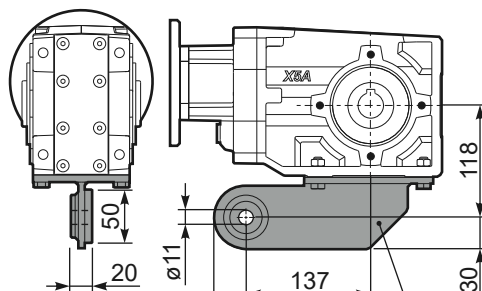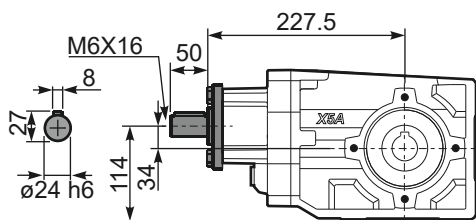

kit cod. KX5A.9.027

Single output shaft
Albero semplice in uscita

	b1	c1	d1	e1	m1	n1	t2
ø30	8	60	30	68	134	202	33
ø35	10	60	35	73.5	141	214.5	38