


## Technical Data

### Power 4.0kW

|                  |                 |
|------------------|-----------------|
| SUPPLY           | AC 3PH 380-440V |
| INPUT CURRENT G* | 13.5 A          |
| INPUT CURRENT P  | 19.5 A          |
| OUTPUT VOLTAGE   | 3PH 0~Vin V     |
| OUTPUT CURRENT G | 9.5 A           |
| OUTPUT CURRENT P | 12.5 A          |
| IP               | 20              |
| EMC FILTER C3    | built-in        |
| EMC FILTER C2    | optional        |
| BRAKING UNIT     | built-in        |




\*G represents the constant torque and P represents the variable torque

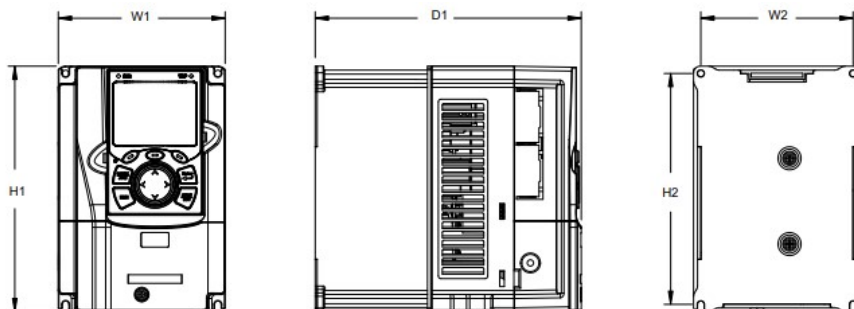

## Installation dimensions

|               |        |
|---------------|--------|
| H1            | 186 mm |
| H2            | 175 mm |
| H3            | - mm   |
| W1            | 126 mm |
| W2            | 115 mm |
| W3            | - mm   |
| W4            | - mm   |
| D1            | 201 mm |
| D2            | - mm   |
| Hole diameter | 5 mm   |
| Screw         | M4     |

## Control Diagram

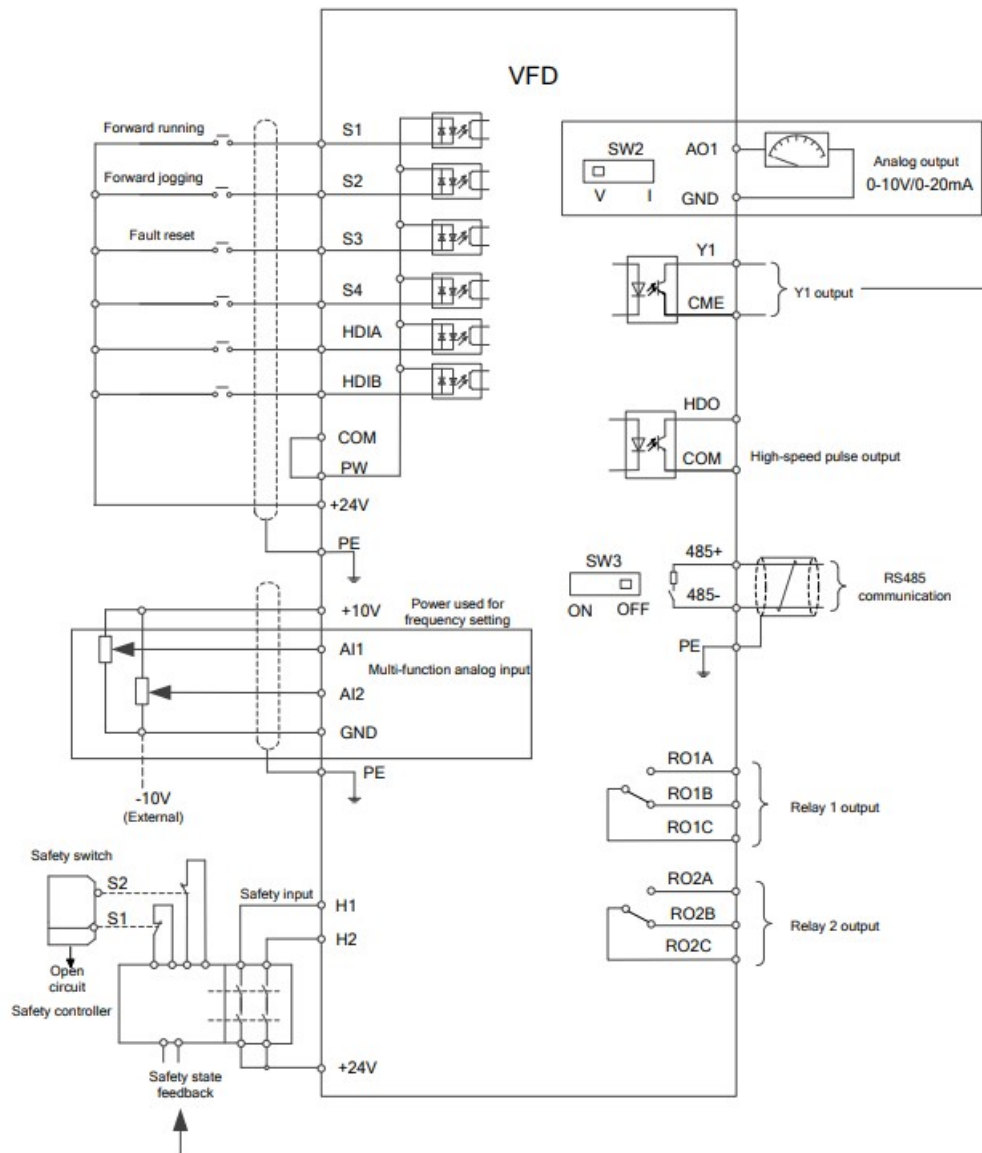

## Packaging size

|        |     |    |
|--------|-----|----|
| Height | 290 | mm |
| Width  | 210 | mm |
| Depth  | 265 | mm |
| Weight | 3.5 | Kg |