


## Technical Data

### Power 18.5kW

|                  |                 |   |
|------------------|-----------------|---|
| SUPPLY           | AC 3PH 380-440V |   |
| INPUT CURRENT G* | 45              | A |
| INPUT CURRENT P  | 51              | A |
| OUTPUT VOLTAGE   | 3PH 0~Vin       | V |
| OUTPUT CURRENT G | 38              | A |
| OUTPUT CURRENT P | 45              | A |
| IP               | 55              |   |
| EMC FILTER C3    | built-in        |   |
| EMC FILTER C2    | optional        |   |
| BRAKING UNIT     | built-in        |   |




\*G represents the constant torque and P represents the variable torque

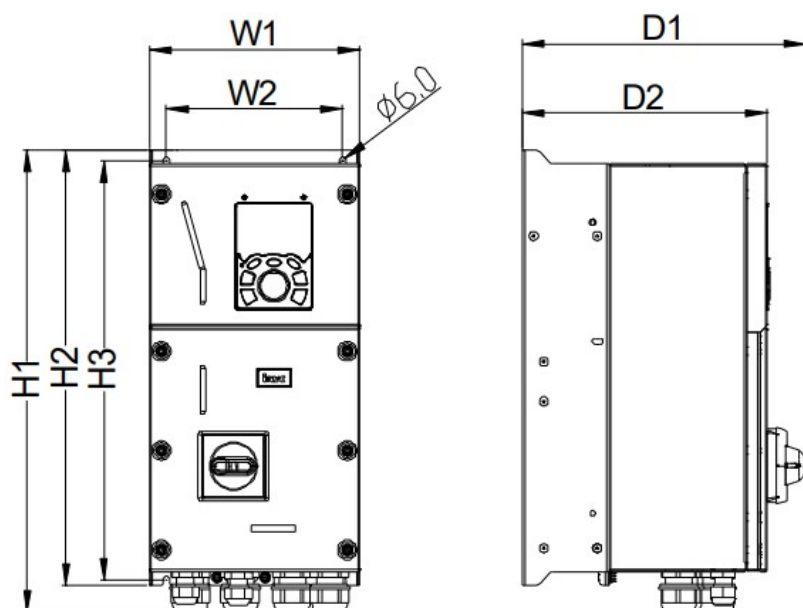

## Installation dimensions

|               |          |
|---------------|----------|
| H1            | 551.5 mm |
| H2            | 522 mm   |
| H3            | 504 mm   |
| W1            | 274 mm   |
| W2            | 234 mm   |
| W3            | - mm     |
| W4            | - mm     |
| D1            | 281.8 mm |
| D2            | 246 mm   |
| Hole diameter | 7 mm     |
| Screw         | M6       |

## Control Diagram

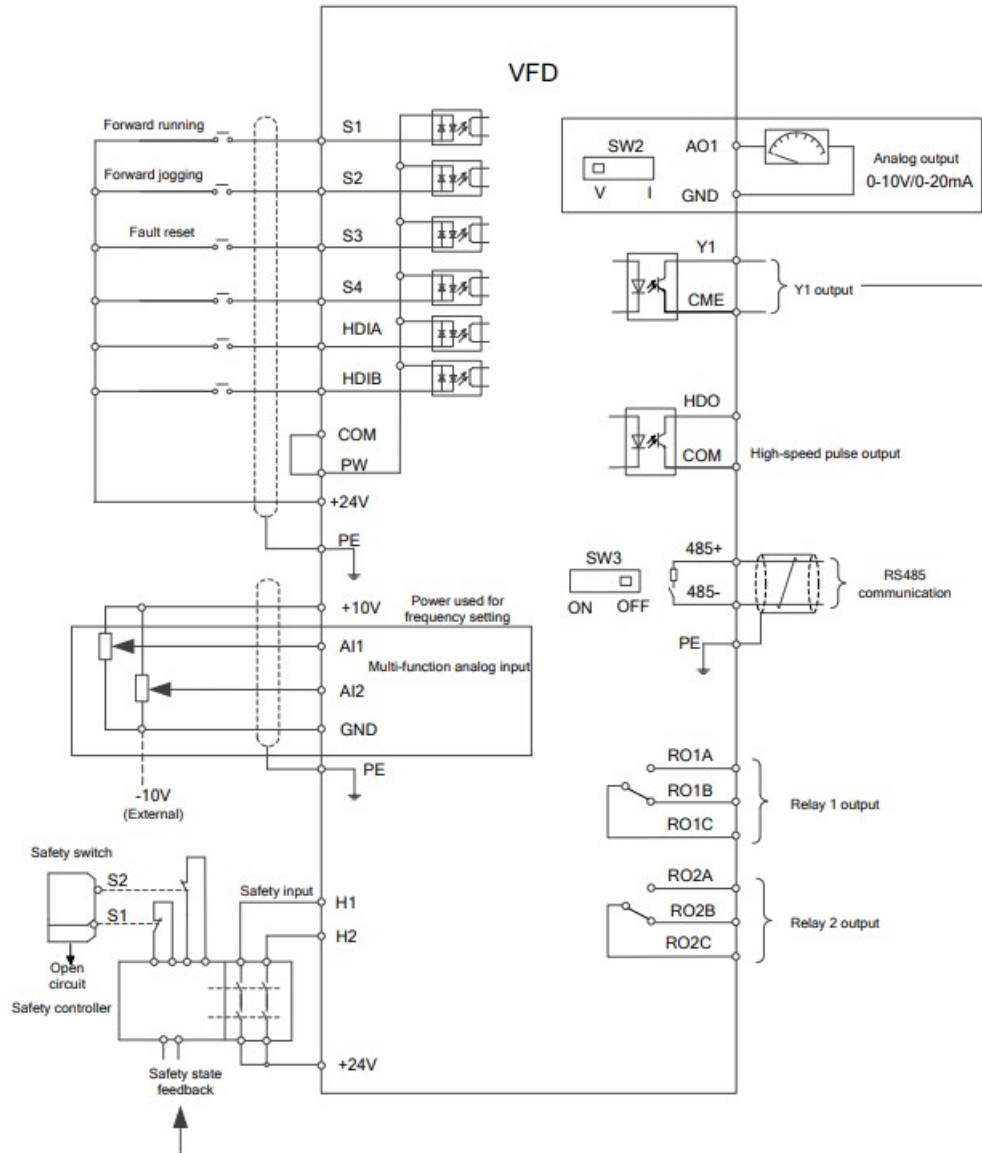

## Packaging size

|        |      |    |
|--------|------|----|
| Height | 680  | mm |
| Width  | 390  | mm |
| Depth  | 425  | mm |
| Weight | 24.5 | Kg |