

Ficha Técnica
Reductor de velocidad
EJES PARALELOS



MODELO	FA52	
Ø EJE DE SALIDA	35	mm
RELACIÓN APROXIMADA	61	
RELACIÓN EXACTA	61.03	
VELOCIDAD DE SALIDA	24	RPM
VELOCIDAD DE SALIDA EXACTA	24	RPM
POTENCIA DE ENTRADA	1.10	KW
ROTACIÓN DE ENTRADA	1400	RPM
PAM DE ENTRADA	90B14	
PAR DE SALIDA	439.59	N.m
PAR NOMINAL	480.00	N.m
POTENCIA NOMINAL	1.2	KW
FACTOR DE SERVICIO	1.09	
EFICIENCIA DINÁMICA	0.96	



Cantidad de Aceite (L)

B3/H1	B6/H4	B7/H3	B8/H2	V5/H5	V6/H6
1.85	1.15	1.15	1.3	2.1	1.3

Cargas Radiales y Axiales



n_2 [min-1]	FA [N]	FR [N]
300	400	2000
200	440	2200
120	500	2500
15	1140	5700


Universal Motors S.A.
Rua Comendador Brandão, 484
4495-375 Póvoa de Varzim
geral@universalmotors.pt
TEL.: 252 299 080

Universal Motors UK, Ltd
Unit E2, Meltham Mills Road
West Yorkshire HD9 4AR
enquiries@universalmotors-group.co.uk
TEL.: +44(0) 1484660222

Universal Motors SL
C/La Habana n.6 nave 4 PI Camporroso
28806 Alcala de Henares
info@universalmotors-group.es
TEL.: 918 864 213

Gearbox weight peso riduttore	15.5 kg
---	----------------

On request
A richiesta

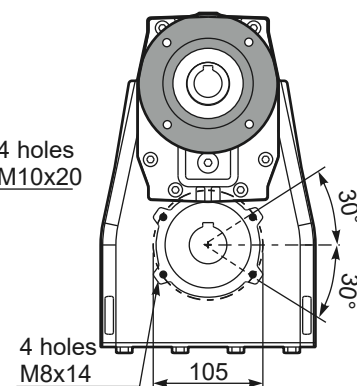

a1 ø	b1	c1	e1	s1	Kit code
250	180	13	215	14	KF60.9.011
-	-	-	-	-	-

Technical drawing of the M6X16 screw. The drawing shows a side view and a top view. The side view indicates a total length of 220.5, a threaded section length of 50, and a head diameter of 27. The top view shows a head diameter of 8 and a head height of 5. The screw is labeled M6X16.

Kit. Cod KF60.5.028

Technical drawing showing the dimensions of the KF60.5.028 kit. The main assembly dimensions are: 38 (total height), 10 (flange thickness), 5 (gap), 50 (cylinder length), 60 (total length), 73.5 (total length including base), and 35 (base diameter). A detail view of the base shows a diameter of 38 and a height of 10. The text 'Kit. Cod KF60.5.028' is present.

[illegible]