

Ficha Técnica
Reductor de velocidad
EJES PARALELOS



MODELO	FA52	
Ø EJE DE SALIDA	35	mm
RELACIÓN APROXIMADA	61	
RELACIÓN EXACTA	61.03	
VELOCIDAD DE SALIDA	24	RPM
VELOCIDAD DE SALIDA EXACTA	24	RPM
POTENCIA DE ENTRADA	1.50	KW
ROTACIÓN DE ENTRADA	1400	RPM
PAM DE ENTRADA	90B5	
PAR DE SALIDA	599.44	N.m
PAR NOMINAL	480.00	N.m
POTENCIA NOMINAL	1.2	KW
FACTOR DE SERVICIO	0.80	
EFICIENCIA DINÁMICA	0.96	



Cantidad de Aceite (L)

B3/H1	B6/H4	B7/H3	B8/H2	V5/H5	V6/H6
1.85	1.15	1.15	1.3	2.1	1.3

Cargas Radiales y Axiales



n_2 [min-1]	FA [N]	FR [N]
300	400	2000
200	440	2200
120	500	2500
15	1140	5700


Universal Motors S.A.
Rua Comendador Brandão, 484
4495-375 Póvoa de Varzim
geral@universalmotors.pt
TEL.: 252 299 080

Universal Motors UK, Ltd
Unit E2, Meltham Mills Road
West Yorkshire HD9 4AR
enquiries@universalmotors-group.co.uk
TEL.: +44(0) 1484660222

Universal Motors SL
C/La Habana n.6 nave 4 PI Camporroso
28806 Alcala de Henares
info@universalmotors-group.es
TEL.: 918 864 213

Gearbox weight peso riduttore	15.5 kg
---	----------------

On request
A richiesta

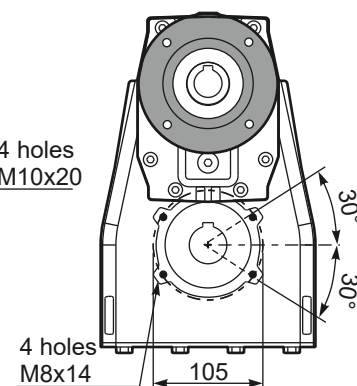

a1 ø	b1	c1	e1	s1	Kit code
250	180	13	215	14	KF60.9.011
-	-	-	-	-	-

Technical drawing of the M6X16 screw. The drawing shows a side view and a top view. The side view dimensions are: total length 220.5, distance from head to start of thread 50, thread length 40, and distance from head to end of thread 5. The top view shows a hexagonal head with a diameter of 8 and a distance from the center to the edge of 27. The thread is labeled M6X16.

Kit. Cod KF60.5.028

10

38

5

50

$\varnothing 35$

-0.005
 -0.020

60

73.5

M10x23

[illegible]