

MODELO	613A	
Ø EJE DE SALIDA	35	mm
RELACIÓN APROXIMADA	93	
RELACIÓN EXACTA	92.78	
VELOCIDAD DE SALIDA	16	RPM
VELOCIDAD DE SALIDA EXACTA	16	RPM
POTENCIA DE ENTRADA	0.25	KW
ROTACIÓN DE ENTRADA	1400	RPM
PAM DE ENTRADA	71B14	
PAR DE SALIDA	148.72	N.m
PAR NOMINAL	520.00	N.m
POTENCIA NOMINAL	0.87	KW
FACTOR DE SERVICIO	3.48	
EFICIENCIA DINÁMICA	0.94	

Cantidad de Aceite (L)

B3/H1	B6/H4	B7/H3	B8/H2	V5/H5	V6/H6
1.05	1.1	1.25	1.25	1.35	1.5

Cargas Radiales y Axiales



n_2 [min-1]	F_A [N]	F_R [N]
300	560	2800
200	640	3200
120	760	3800
15	1300	6500

Gearbox weight	With flange	14.3 kg
peso riduttore	With feet	14.7 Kg



Feet Code	Market reference	G	H	R	L	S	H1	O	Øl	S2 only with motor flange	B5 max. Flange	kit code
B4	412/3	20	130	180	149.5	216	242	18	14	-	-	KC60.9.024
S4	47-57	30	115	135	165	170	227	25	14	13 132B5	-	KC50.9.022
M3	62/3	35	120	170+185	110	230	232	20	14	8 132B5	-	KC60.9.023
S7	77	35	140	170	205	204	252	8	14	-	-	KC60.9.029LM
H4	024-243	35	155	170	150	225	267	30	14	-	-	KC60.9.025

 Most popular types
Tipi più diffusi

Technical drawing of the KC50.9.011 motor showing front, side, and detail views with dimensions.

Front View Dimensions:

- Flange diameter: $\varnothing 67.5$
- Flange thickness: $p1$
- Mounting hole diameter: $\varnothing x$

Side View Dimensions:

- Total height: $a1$
- Height to mounting flange: $b1 \ 17$
- Mounting flange thickness: $f1$
- Distance from mounting flange to output shaft center: $c1$
- Output shaft diameter: $d1$
- Output shaft length: $h1$
- Distance from output shaft center to mounting flange: 2.5
- Distance from output shaft center to motor body: 8.5 with KC50.9.011

Detail Y Dimensions:

- Distance from output shaft center to motor body: 61.5 with KC50.9.011
- Distance from output shaft center to motor body: 67.5
- Distance from output shaft center to motor body: 26.1
- Distance from output shaft center to motor body: $g6$

***Available output shaft / Albero di uscita**

***Available output shaft** / Albero di uscita

	Shaft - d1	p1	h1	x
Standard	ø 35x70	10	38	M10x22
On request A richiesta	ø 28x60	8	31	M8x20
	ø 30x60	8	33	M10x22
	ø 38x70	10	41	M10x25
	ø 40x80	12	43	M12x28


Available output flanges / flange di uscita

a1 ø	b1	c1	e1	f1	s1	kit code
160	110	14	130	3.5	11	KC50.9.011
200	130	13	164	3.5	11	KC50.9.012
250	180	15.5	215	4	14	KC50.9.013

With flange and feet only on request. Ask for compatibility

With flange and feet
only on request.
Ask for compatibility

R613A-N... Input Shaft
Albero in entrata

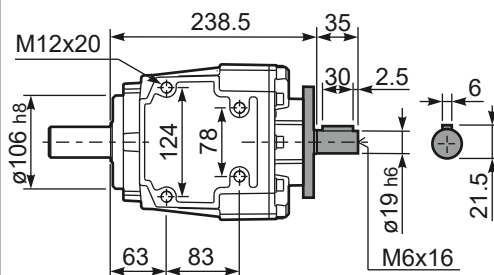

B5 Motor Flanges	A	C _{max}	g6	k1	kit code	k1 with KC50.9.011
63 B5	248	251.1	140	250.5	K063.4.041	256.5
71 B5	246	261.1	160	248.5	K063.4.042	254.5
80/90 B5	248	281.1	200	250.5	K063.4.043	256.5

B14 Motor Flanges	A	C_{max}	g6	k1	kit code	k1 with KC50.9.011
71 B14	246	233.6	105	248.5	K063.4.047	254.5
80 B14	248	241.1	120	250.5	K063.4.046	256.5
90 B14	248	251.1	140	250.5	K063.4.041	256.5