

MODELO	FA52	
Ø VEIO SAÍDA	35	mm
RÁCIO APROXIMADO	9	
RÁCIO EXATO	8.82	
VELOCIDADE SAÍDA	162	RPM
VELOCIDADE SAÍDA EXATA	166	RPM
POTÊNCIA ENTRADA	5.50	KW
ROTAÇÃO ENTRADA	1400	RPM
PAM ENTRADA	132B14	
TORQUE SAÍDA	317.65	N.m
TORQUE NOMINAL	320.00	N.m
POTÊNCIA NOMINAL	5.5	KW
FATOR SERVIÇO	1.00	
EFICIÊNCIA DINÂMICA	0.96	



QUANTIDADE DE ÓLEO (L)

B3/H1	B6/H4	B7/H3	B8/H2	V5/H5	V6/H6
1.85	1.15	1.15	1.3	2.1	1.3


CARGAS RADIAIS E AXIAIS



n_2 [min-1]	FA [N]	FR [N]
300	400	2000
200	440	2200
120	500	2500
15	1140	5700

Gearbox weight peso riduttore	15.5 kg
---	----------------

On request
A richiesta

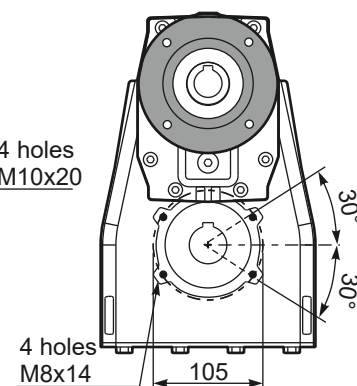

a1 ø	b1	c1	e1	s1	Kit code
250	180	13	215	14	KF60.9.011
-	-	-	-	-	-

Technical drawing of the M6X16 screw. The drawing shows a side view and a top view. The side view dimensions are: total length 220.5, distance from head to start of thread 50, distance from head to end of thread 40, and distance from head to start of hex section 5. The top view shows a hexagonal head with a width of 8 and a distance from the center to the edge of 27. The thread is labeled M6X16.

Kit. Cod KF60.5.028

10

38

5

50

60

73.5

$\varnothing 35$

-0.005
 -0.020

M10x23

[illegible]