


MODELO	513A
Ø VEIO SAÍDA	30 mm
RÁCIO APROXIMADO	165
RÁCIO EXATO	165.29
VELOCIDADE SAÍDA	9 RPM
VELOCIDADE SAÍDA EXATA	9 RPM
POTÊNCIA ENTRADA	0.18 KW
ROTAÇÃO ENTRADA	1400 RPM
PAM ENTRADA	63B5
TORQUE SAÍDA	190.76 N.m
TORQUE NOMINAL	326.00 N.m
POTÊNCIA NOMINAL	0.31 KW
FATOR SERVIÇO	1.72
EFICIÊNCIA DINÂMICA	0.94

QUANTIDADE DE ÓLEO (L)


B3/H1	B6/H4	B7/H3	B8/H2	V5/H5	V6/H6
1	0.9	1.113	1.15	1.45	1.4

CARGAS RADIAIS E AXIAIS

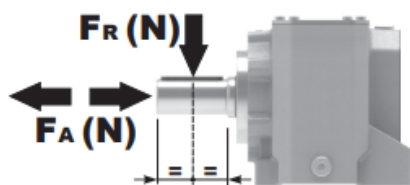

n_2 [min-1]	F_A [N]	F_R [N]
300	460	2300
200	520	2600
120	620	3100
15	1000	5000

Gearbox weight peso riduttore	With flange	11.9 kg
	With feet	12.1 Kg



Feet Code	Market reference	G	H	R	L	S	H1	O	Øl	S2 only with motor flange	B5 max. Flange	kit code
B3	312/3	18	110	160	130	190	211	20	11	-	-	KC50.9.024
B4	30/35	20	130	180	149.5	216	231	18	14	-	-	KC60.9.024
S4	47-57	30	115	135	165	170	216	25	14	-	-	KC50.9.022
H3	023-233	30	130	135	135	185	231	25	14	-	-	KC50.9.025
M2	52/3	30	110	135-150	100	190	211	18	11	-	-	KC50.9.023

 Most popular types
Tipi più diffusi

Technical drawing of the output shaft assembly. The drawing includes a front view on the left showing a circular shaft with a central hole of diameter $p1$ and a mounting flange of diameter x . A circular detail callout labeled "Detail Y" shows a cross-section of the shaft with a diameter of $d1$ and a height of $h1$. The shaft is mounted on a housing with a total width of 8.5 with KC50.9.011 and a specific feature width of 2.5 . The side view on the right shows the shaft with a total length of $a1$, a mounting flange of diameter $b1$ and thickness $f7$, a central shaft section of diameter $f1$ and length $c1$, and a total shaft diameter of 57.5 . The shaft is mounted on a housing with a total width of 51.5 with KC50.9.011 and a specific feature width of 15 . The housing has a total height of $g6$ and a mounting flange of diameter $K1$.

	Shaft - d1	p1	h1	x
Standard	ø 30x60	8	33	M10x22
On request A richiesta	ø 24x50	8	27	M8x19
	ø 25x50	8	28	M8x19
	ø 28x60	8	31	M8x19
	ø 35x60	10	38	M10x22

a1 ø	b1	c1	e1	f1	s1	kit code
160	110	14	130	3.5	11	KC50.9.011
200	130	13	165	3.5	11	KC50.9.012
250	180	15.5	215	4	14	KC50.9.013

With flange and feet only on request.
Ask for compatibility

Technical drawing of the B14 motor flange, showing side and front views with dimensions.

Side View Dimensions:


- Overall length: 217.5
- Flange thickness: 9.6
- Shaft diameter: $\phi 30$ h6
- Shaft thread: M10x22
- Flange outer diameter: $\phi 123$
- Flange hole diameter: $\phi 60$
- Flange hole spacing: 50
- Flange hole diameter: 15.5
- Flange hole spacing: 12
- Flange hole diameter: 15
- Flange hole spacing: 5
- Flange hole diameter: 33
- Flange hole spacing: ∞

Front View Dimensions:

- Overall diameter: $\phi 123$
- Flange hole diameter: 69.5
- Flange hole spacing: 170.5
- Flange hole diameter: 65°
- Flange hole spacing: 50°
- Flange hole diameter: N.5 M10x17

Notes:

- Suggested B14 motor flanges

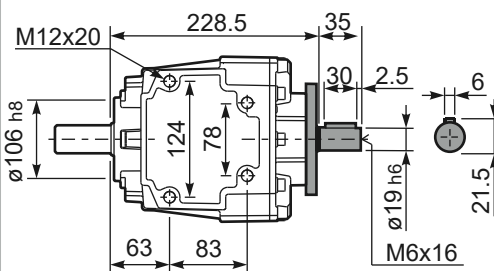

B5 Motor Flanges	A	C _{max}	g6	k1	kit code	k1 with KC50.9.011
63 B5	238	215	140	240.5	K063.4.041	246.5
71 B5	236	225	160	238.5	K063.4.042	244.5
80/90 B5	238	245	200	240.5	K063.4.043	246.5

B14 Motor Flanges	A	C_{max}	g6	k1	kit code	k1 with KC50.9.011
71 B14	236	197.5	105	238.5	K063.4.047	244.5
80 B14	238	205	120	240.5	K063.4.046	246.5
90 B14	238	215	140	240.5	K063.4.041	246.5