


Ficha Técnica  
Redutor de Velocidade  
PARAFUSO SEM FIM QUADRADO




|                        |        |     |
|------------------------|--------|-----|
| MODELO                 | Q63    |     |
| Ø VEIO SAÍDA           | 25     | mm  |
| RÁCIO APROXIMADO       | 25     |     |
| RÁCIO EXATO            | 24.00  |     |
| VELOCIDADE SAÍDA       | 58     | RPM |
| VELOCIDADE SAÍDA EXATA | 61     | RPM |
| POTÊNCIA ENTRADA       | 0.37   | KW  |
| ROTAÇÃO ENTRADA        | 1400   | RPM |
| PAM ENTRADA            | 71B14  |     |
| TORQUE SAÍDA           | 45.43  | N.m |
| TORQUE NOMINAL         | 142.00 | N.m |
| POTÊNCIA NOMINAL       | 1.2    | KW  |
| FATOR SERVIÇO          | 3.24   |     |
| EFICIÊNCIA DINÂMICA    | 0.75   |     |

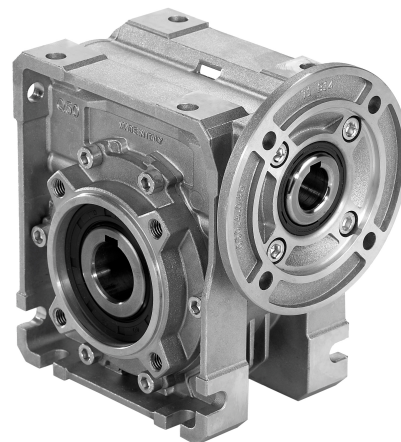

QUANTIDADE DE ÓLEO (L)

| B3/H1 | B6/H4 | B7/H3 | B8/H2 | V5/H5 | V6/H6 |
|-------|-------|-------|-------|-------|-------|
| 0.3   | 0.3   | 0.3   | 0.3   | 0.3   | 0.3   |

CARGAS RADIAIS E AXIAIS

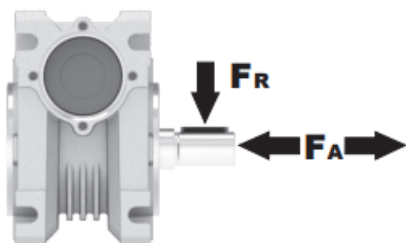

| $n_2$ [min-1] | FA [N] | FR [N] |
|---------------|--------|--------|
| 200           | 360    | 1800   |
| 100           | 460    | 2300   |
| 50            | 600    | 3000   |
| 15            | 800    | 4000   |

Universal Motors S.A.  
Rua Comendador Brandão, 484  
4495-375 Póvoa de Varzim  
[geral@universalmotors.pt](mailto:geral@universalmotors.pt)  
TEL.: 252 299 080

Universal Motors UK, Ltd  
Unit E2, Meltham Mills Road  
West Yorkshire HD9 4AR  
[enquiries@universalmotors-group.co.uk](mailto:enquiries@universalmotors-group.co.uk)  
TEL.: +44(0) 1484660222

Universal Motors SL  
C/La Habana n.6 nave 4 PI Camporoso  
28806 Alcala de Henares  
[info@universalmotors-group.es](mailto:info@universalmotors-group.es)  
TEL.: 918 864 213

**6.00 kg**

**On request**  
A richiesta

| type S    | øD                             | E | G  | L   | N  | O   | P   | Q  | kit code             |
|-----------|--------------------------------|---|----|-----|----|-----|-----|----|----------------------|
| <b>F1</b> | 130 <sup>+0.20<br/>+0.15</sup> | 7 | 13 | 110 | 50 | 165 | 200 | 13 | 1 KS070.9.013<br>2 - |
| <b>F2</b> | 115 <sup>+0.20<br/>+0.15</sup> | 7 | 13 | 124 | 64 | 150 | 175 | 11 | 1 KS063.9.013<br>2 - |
| <b>F3</b> | 110 <sup>+0.035<br/>0</sup>    | 5 | 11 | 90  | 30 | 130 | 160 | 10 | 1 KS063.9.011<br>2 - |

Technical drawing of a mechanical part, likely a valve or actuator component. The drawing shows a side view of the component with a handle on the left. Key dimensions are indicated: a horizontal distance of 72.5 from the handle to the center of the main body, a vertical distance of 11 from the top of the main body to the center of the handle, a horizontal distance of 150 from the center of the main body to the center of the handle, and a total horizontal distance of 180 from the handle to the center of the main body.

② kit cod. K063.5.029 type B

[illegible]