

Technical Data Sheet
Gearbox
SHAFT MOUNTED



MODEL	FA52	
Ø OUTPUT SHAFT	35	mm
APPROXIMATE RATIO	39	
EXACT RATIO	38.55	
OUTPUT SPEED	37	RPM
EXACT OUTPUT SPEED	38	RPM
INPUT POWER	2.20	KW
INPUT ROTATION	1400	RPM
INPUT PAM	100B5	
OUTPUT TORQUE	555.34	N.m
NOMINAL TORQUE	490.00	N.m
NOMINAL POWER	1.9	KW
SERVICE FACTOR	0.86	
DYNAMIC EFFICIENCY	0.96	



Oil Quantity (L)

B3/H1	B6/H4	B7/H3	B8/H2	V5/H5	V6/H6
1.85	1.15	1.15	1.3	2.1	1.3

Radial and Axial Loads



n_2 [min-1]	FA [N]	FR [N]
300	400	2000
200	440	2200
120	500	2500
15	1140	5700


Universal Motors S.A.
Rua Comendador Brandão, 484
4495-375 Póvoa de Varzim
geral@universalmotors.pt
TEL.: 252 299 080

Universal Motors UK, Ltd
Unit E2, Meltham Mills Road
West Yorkshire HD9 4AR
enquiries@universalmotors-group.co.uk
TEL.: +44(0) 1484660222

Universal Motors SL
C/La Habana n.6 nave 4 PI Camporroso
28806 Alcala de Henares
info@universalmotors-group.es
TEL.: 918 864 213

Gearbox weight peso riduttore	15.5 kg
---	----------------

On request
A richiesta

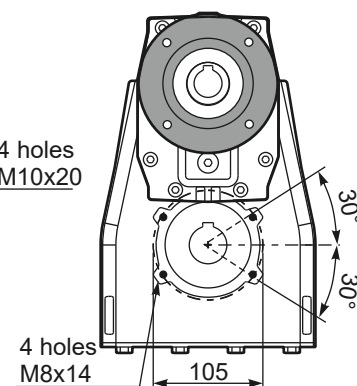

Technical drawing of the 1000 Series Servo Motor showing front and side views with dimensions.

Front View Dimensions:

- Overall width: 173
- Mounting flange diameter: $\varnothing 92$
- Mounting flange thickness: 6.5

Side View Dimensions:

- Overall length: 157.5
- Shaft diameter: $\varnothing 35$ H7
- Shaft length: 30
- Motor body length: 30
- Mounting flange thickness: 6.5