

Technical Data Sheet
Gearbox
INLINE GEARBOX




MODEL	211A
Ø OUTPUT SHAFT	14 mm
APPROXIMATE RATIO	2.5
EXACT RATIO	2.35
OUTPUT SPEED	584 RPM
EXACT OUTPUT SPEED	621 RPM
INPUT POWER	0.55 KW
INPUT ROTATION	1400 RPM
INPUT PAM	71B14
OUTPUT TORQUE	8.11 N.m
NOMINAL TORQUE	12.00 N.m
NOMINAL POWER	0.76 KW
SERVICE FACTOR	1.38
DYNAMIC EFFICIENCY	0.92

Oil Quantity (L)

B3/H1	B6/H4	B7/H3	B8/H2	V5/H5	V6/H6
0.05	0.05	0.05	0.05	0.05	0.05

Radial and Axial Loads

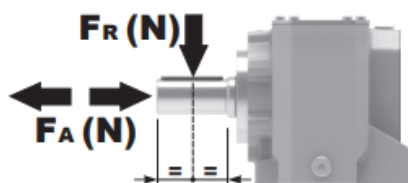

n_2 [min-1]	FA [N]	FR [N]
700	101	504
400	138	696
200	175	876
140	192	960

Universal Motors S.A.
Rua Comendador Brandão, 484
4495-375 Póvoa de Varzim
geral@universalmotors.pt
TEL.: 252 299 080

Universal Motors UK, Ltd
Unit E2, Meltham Mills Road
West Yorkshire HD9 4AR
enquiries@universalmotors-group.co.uk
TEL.: +44(0) 1484660222


Universal Motors SL
C/La Habana n.6 nave 4 PI Camporoso
28806 Alcala de Henares
info@universalmotors-group.es
TEL.: 918 864 213

P211A-F...

Basic wormbox
Riduttore base

Gearbox weight
peso riduttore

1.40 kg

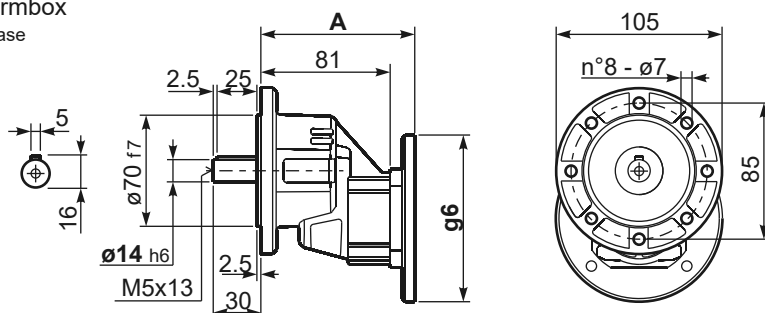


B5 Motor Flanges	A	g6	kit code
63 B5	99.5	138	K050.4.041
71 B5	97	160	K050.4.042

B14 Motor Flanges	A	g6	kit code
56 B14	97	80	KC40.4.049
63 B14	99.5	90	K050.4.047
71 B14	97	105	K050.4.045

R211A-F...

Basic wormbox
Riduttore base

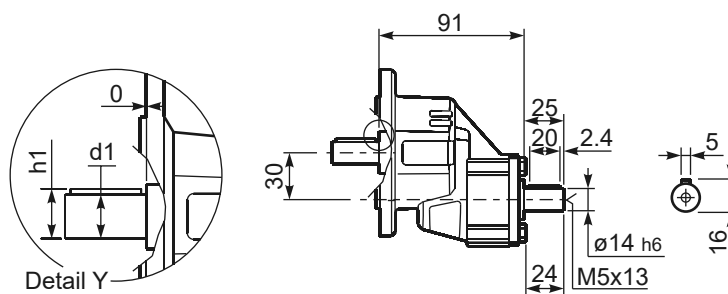

***Available output shaft / Albero di uscita**

	Shaft - d1	p1	h1	x
Standard	ø 14x30	5	16	M5x13