


MODELO	FA42	
Ø VEIO SAÍDA	30	mm
RÁCIO APROXIMADO	12	
RÁCIO EXATO	12.33	
VELOCIDADE SAÍDA	122	RPM
VELOCIDADE SAÍDA EXATA	118	RPM
POTÊNCIA ENTRADA	1.10	KW
ROTAÇÃO ENTRADA	1400	RPM
PAM ENTRADA	90B5	
TORQUE SAÍDA	88.81	N.m
TORQUE NOMINAL	260.00	N.m
POTÊNCIA NOMINAL	3.2	KW
FATOR SERVIÇO	2.91	
EFICIÊNCIA DINÂMICA	0.96	



QUANTIDADE DE ÓLEO (L)

B3/H1	B6/H4	B7/H3	B8/H2	V5/H5	V6/H6
1.15	0.7	0.7	0.7	1.2	0.8

CARGAS RADIAIS E AXIAIS

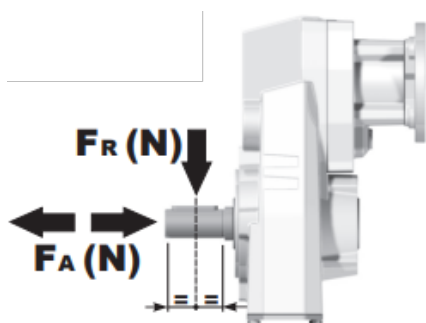

n_2 [min-1]	FA [N]	FR [N]
300	300	1500
200	350	1750
120	410	2050
15	800	4000

9.0 kg

On request
A richiesta

Technical drawing of the 1000W motor unit, showing side, front, and detail views with dimensions.

Side View Dimensions:

- Overall width: A
- Top flange diameter: $\varnothing 11$
- Top flange thickness: 40
- Motor body height: 160
- Base height: 123
- Base diameter: $\varnothing F$
- Base mounting hole diameter: $\varnothing 95 f7$
- Base mounting hole offset: 3.5
- Base mounting hole offset: 5
- Base mounting hole offset: 110

Front View Dimensions:

- Top flange width: 18
- Motor body height: 88
- Base mounting hole diameter: 4 holes M8x15
- Base mounting hole offset: 115
- Base mounting hole offset: 178

Detail Views:

- Top flange detail: 8, 25H7
- Base mounting hole detail: $\varnothing 45$, 110

[illegible]