

Ficha Técnica
Reductor de velocidad
EJES PARALELOS




MODELO	FA42	
Ø EJE DE SALIDA	30	mm
RELACIÓN APROXIMADA	26	
RELACIÓN EXACTA	25.85	
VELOCIDAD DE SALIDA	56	RPM
VELOCIDAD DE SALIDA EXACTA	56	RPM
POTENCIA DE ENTRADA	1.10	KW
ROTACIÓN DE ENTRADA	1400	RPM
PAM DE ENTRADA	90B5	
PAR DE SALIDA	186.19	N.m
PAR NOMINAL	320.00	N.m
POTENCIA NOMINAL	1.9	KW
FACTOR DE SERVICIO	1.73	
EFICIENCIA DINÁMICA	0.96	



Cantidad de Aceite (L)

B3/H1	B6/H4	B7/H3	B8/H2	V5/H5	V6/H6
1.15	0.7	0.7	0.7	1.2	0.8

Cargas Radiales y Axiales

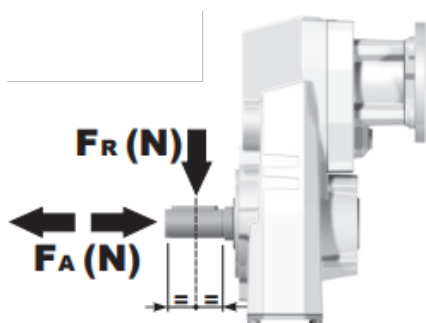

n_2 [min-1]	FA [N]	FR [N]
300	300	1500
200	350	1750
120	410	2050
15	800	4000

Universal Motors S.A.
Rua Comendador Brandão, 484
4495-375 Póvoa de Varzim
geral@universalmotors.pt
TEL.: 252 299 080

Universal Motors UK, Ltd
Unit E2, Meltham Mills Road
West Yorkshire HD9 4AR
enquiries@universalmotors-group.co.uk
TEL.: +44(0) 1484660222

Universal Motors SL
C/La Habana n.6 nave 4 PI Camporosso
28806 Alcalá de Henares
info@universalmotors-group.es
TEL.: 918 864 213

Gearbox weight peso riduttore	9.0 kg
---	---------------

On request
A richiesta

Technical drawing of a mechanical part showing two views: a side view and a front view.

Side View (Left):

- Top horizontal dimensions: 32, 36, c1.
- Vertical dimensions: b1 f7, -0.005 -0.020, ø30, 28, f1.
- Bottom horizontal dimension: 170.

Front View (Right):

- Top horizontal dimensions: 36, 110.
- Bottom horizontal dimension: k1.

[illegible]