

Technical Data Sheet
Gearbox
WORM GEARBOX ROUND DESIGN



MODEL	030	
Ø OUTPUT SHAFT	14	mm
APPROXIMATE RATIO	5	
EXACT RATIO	5.00	
OUTPUT SPEED	292	RPM
EXACT OUTPUT SPEED	292	RPM
INPUT POWER	0.25	KW
INPUT ROTATION	1400	RPM
INPUT PAM	63B5	
OUTPUT TORQUE	6.99	N.m
NOMINAL TORQUE	17.00	N.m
NOMINAL POWER	0.6	KW
SERVICE FACTOR	2.40	
DYNAMIC EFFICIENCY	0.82	



Oil Quantity (L)

B3/H1	B6/H4	B7/H3	B8/H2	V5/H5	V6/H6
0.03	0.03	0.03	0.03	0.03	0.03

Radial and Axial Loads



n_2 [min-1]	FA [N]	FR [N]
200	120	600
100	160	800
50	200	1000
15	280	1400

Universal Motors S.A.
Rua Comendador Brandão, 484
4495-375 Póvoa de Varzim
geral@universalmotors.pt
TEL.: 252 299 080

Universal Motors UK, Ltd
Unit E2, Meltham Mills Road
West Yorkshire HD9 4AR
enquiries@universalmotors-group.co.uk
TEL.: +44(0) 1484660222

Universal Motors SL
C/La Habana n.6 nave 4 PI Camporoso
28806 Alcala de Henares
info@universalmotors-group.es
TEL.: 918 864 213

Gearbox weight peso riduttore	1.05 kg
---	----------------

55 40 30 2 52 39 65


ØF

4 holes M6x10

Mounting holes position
Posizione fori di montaggio

5 16.3 14 H8


Standard
Hollow shaft

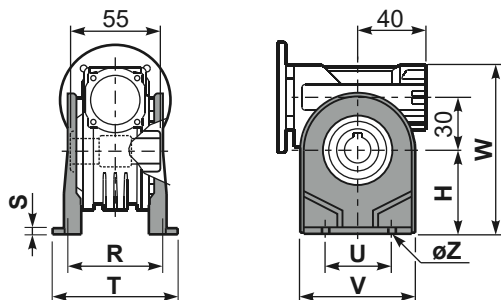Feet
Piedini

Technical drawing of a mechanical part showing a cross-section. The drawing includes dimensions: 30 (width of the top flange), U (width of the base), V (width of the base), and ØZ (diameter of the central hole). The part has a semi-circular top and a central hole.

	H	R	S	T	U	V	Y	W	øZ	kit code
type B	55	66	3	87	50	78	94	107	ø6.5	K030.9.022
type S	52	66	3	87	52	90	91	104	ø6.5	KS030.9.023

Reaction arm
Braccio di reazione

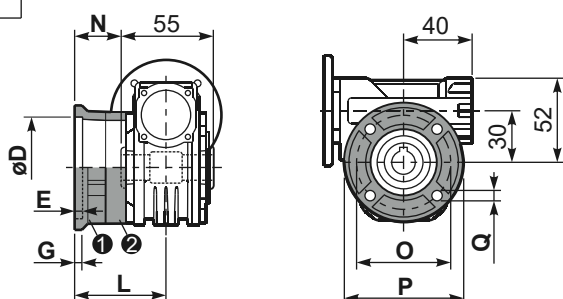

Technical drawing of the K045.9.027 kit, showing a side view and a top view.

Side View Dimensions:

- Total length: 118
- Mounting flange width: 40
- Body diameter: 8.2
- Base diameter: 100


Top View Dimensions:

- Central hole diameter: 4
- Mounting flange width: 30
- Central hole diameter: 50

Kit cod. K045.9.027

type B	øD	E	G	L	N	O	P	Q	kit code
FC	50 ^{+0.15} _{+0.05}	6	6	50.5	23	68	80	7	① K030.9.010 ② -
FL	60 ^{+0.15} _{+0.05}	6	6	55.5	28	87	110	8.5	① K045.9.010 ② -
type S	øD	E	G	L	N	O	P	Q	kit code
F1	40 ^{+0.15} _{+0.10}	3.5	5.5	49	21.5	56	80	6.5	① KS030.9.012 ② -

Double Shaft
Albero lento bisp.

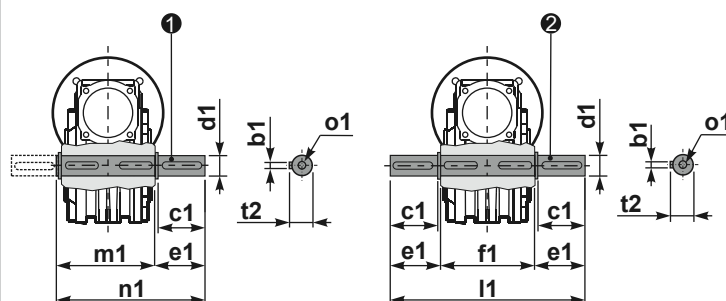

② kit cod. K030.5.029 type **B**

	ød	e	g	l	m	x	kit code
type B	9 h6	10.2	3	20	58	-	K030.5.006 PAM63
type S	-	-	-	-	-	-	-

[illegible]