


MODELO	512A
Ø VEIO SAÍDA	30 mm
RÁCIO APROXIMADO	5
RÁCIO EXATO	5.01
VELOCIDADE SAÍDA	292 RPM
VELOCIDADE SAÍDA EXATA	291 RPM
POTÊNCIA ENTRADA	3.00 KW
ROTAÇÃO ENTRADA	1400 RPM
PAM ENTRADA	100B5
TORQUE SAÍDA	98.42 N.m
TORQUE NOMINAL	200.00 N.m
POTÊNCIA NOMINAL	6.1 KW
FATOR SERVIÇO	2.03
EFICIÊNCIA DINÂMICA	0.96

QUANTIDADE DE ÓLEO (L)

B3/H1	B6/H4	B7/H3	B8/H2	V5/H5	V6/H6
0.7	0.8	1.15	1.2	1.15	1.25

CARGAS RADIAIS E AXIAIS

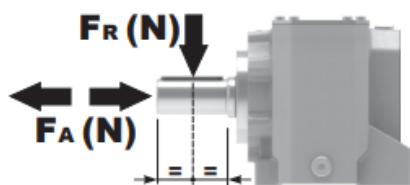


n_2 [min-1]	F_A [N]	F_R [N]
300	460	2300
200	520	2600
120	620	3100
15	1000	5000

Universal Motors S.A.
Rua Comendador Brandão, 484
4495-375 Póvoa de Varzim
geral@universalmotors.pt
TEL.: 252 299 080

Universal Motors UK, Ltd
Unit E2, Meltham Mills Road
West Yorkshire HD9 4AR
enquiries@universalmotors-group.co.uk
TEL.: +44(0) 1484660222

Universal Motors SL
C/La Habana n.6 nave 4 PI Camporoso
28806 Alcala de Henares
info@universalmotors-group.es
TEL.: 918 864 213

Gearbox weight peso riduttore	With flange	11.7 kg
	With feet	11.9 Kg



Feet Code	Market reference	G	H	R	L	S	H1	O	øI	S2 only with motor flange	B5 max. Flange	kit code
B3	312/3	18	110	160	130	190	211	20	11	10 100/112B5 35 132B5	-	KC50.9.024
B4	30/35	20	130	180	149.5	216	231	18	14	15 132B5	-	KC60.9.024
S4	47-57	30	115	135	165	170	216	25	14	5 100/112B5 30 132B5	-	KC50.9.022
H3	023-233	30	130	135	135	185	231	25	14	15 132B5	-	KC50.9.025
M2	52/3	30	110	135+150	100	190	211	18	11	10 100/112B5 35 132B5	-	KC50.9.023

 Most popular types
Tipi più diffusi

The technical drawing illustrates the output shaft assembly with three main views:



- Front View (Left):** Shows a circular end view with a central hole. Dimensions include p_1 (hole diameter), x (reference axis), h_1 (shaft height), and d_1 (inner bore diameter).
- Side View (Right):** A longitudinal section showing the shaft's profile. Key dimensions include:
 - a_1 : Total length of the shaft.
 - b_1 : Distance from the front face to the start of the internal thread.
 - f_1 : Thread pitch.
 - c_1 : Distance from the end of the thread to the rear face.
 - 57.5 : Dimension from the front face to the center of the internal thread.
 - $51.5 \text{ with KC50.9.011}$: Alternative dimension for the thread location.
 - g_6 : Flange thickness.
 - k_1 : Flange outer diameter.
 - $\phi 5.3$: Internal thread specification.
- Detail Y (Top Left):** An enlarged view of the mounting flange area. It shows a shoulder with a width of $8.5 \text{ with KC50.9.011}$ and a fillet radius of 2.5 .

	Shaft - d1	p1	h1	x
Standard	ø 30x60	8	33	M10x22
On request A richiesta	ø 24x50	8	27	M8x19
	ø 25x50	8	28	M8x19
	ø 28x60	8	31	M8x19
	ø 35x60	10	38	M10x22

a1 ø	b1	c1	e1	f1	s1	kit code
160	110	14	130	3.5	11	KC50.9.011
200	130	13	165	3.5	11	KC50.9.012
250	180	15.5	215	4	14	KC50.9.013

With flange and feet only on request.
Ask for compatibility

R512A-N... Input Shaft
Albero in entrata

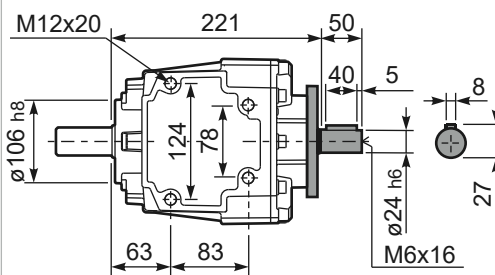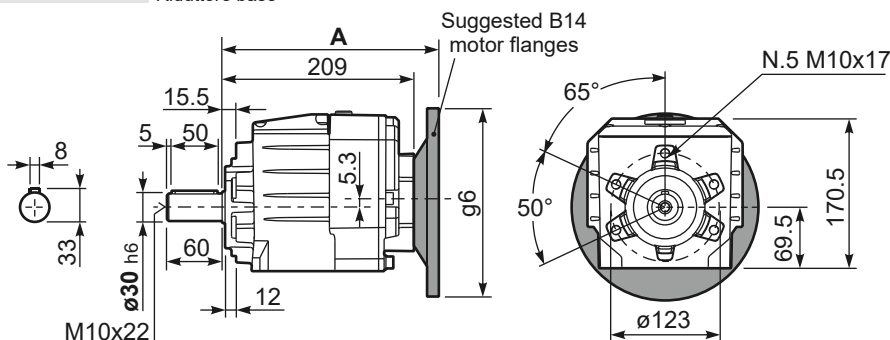

B5 Motor Flanges	A	C_{max}	g6	k1	kit code	k1 with KC50.9.011	B14 Motor Flanges	A	C_{max}	g6	k1	kit code	k1 with KC50.9.011
71 B5	227.5	215.3	160	230	K023.4.041	236	80 B14	229.5	195.3	120	232	K085.4.046	238
80/90 B5	229.5	235.3	200	232	K023.4.042	238	90 B14	229.5	205.3	140	232	K085.4.045	238
100/112 B5	238.5	260.3	250	241	K023.4.043	247	100/112 B14	238.5	215.3	160	241	K085.4.047	247
132 B5	259.5	285.3	300	259	KC51.4.043	265	132 B14	259.5	235.3	200	259	KC51.4.041	265